

Josephine
KIMBERLING™

Glam-O-Ruffle Pillow

PILLOW PATTERN



Free pattern from the

Glam Garden
COLLECTION

Glam-O-Ruffle Pillow

By Josephine Kimberling

- **Note:** All seam allowances are $\frac{5}{8}$ ", and included in the pattern pieces, unless otherwise noted
- Please read through all of the instructions before you start your project
- Fabric requirements listed and pattern instructions are to make ruffle pillow as shown, with different fabrics mixing and matching (see FABRIC PATTERN DISTRIBUTION below).

MATERIALS LIST:

- A – Pillow Body:** AJG-9929-193, $\frac{5}{8}$ yard
- B – Center Strip:** AJG-9928-193, $\frac{1}{8}$ yard
- C – Ruffles:** AJG-9930-193, $\frac{1}{4}$ yard
- D – Ruffles:** AJG-9926-193, $\frac{1}{4}$ yard
- E – Ruffles:** AJG-9931-110, $\frac{1}{4}$ yard

· **Interfacing** – $\frac{1}{8}$ yard fusible medium weight

· **Thread** – Coordinating color

· **18" Pillow Insert**

TOOLS:

- Tape measure
- Scissors
- Iron
- Chalk pencil or fabric marker
- Straight pins


CUT:

- A – Pillow Panel Front:** cut 1, $19\frac{1}{4}$ " square
- **Pillow Panel Back:** cut 2, $19\frac{1}{4}$ "w x 13"h
- B – Center Strip:** cut 1 strip, 4"w x $19\frac{1}{4}$ "h
- C – Ruffles:** cut 2 strips $4\frac{1}{2}$ "w x 36"h
- D – Ruffles:** cut 2 strips $4\frac{1}{2}$ "w x 36"h
- E – Ruffles:** cut 2 strips $4\frac{1}{2}$ "w x 36"h


From Interfacing –

- **Medium weight:** cut 1 strip, 4"w x $19\frac{1}{4}$ "h

FABRIC PATTERN DISTRIBUTION:

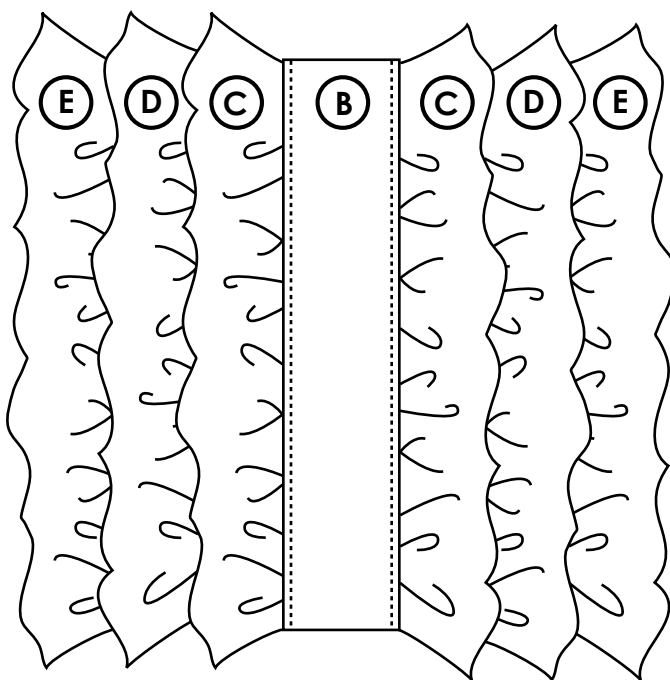

Ruffle Pillow Front

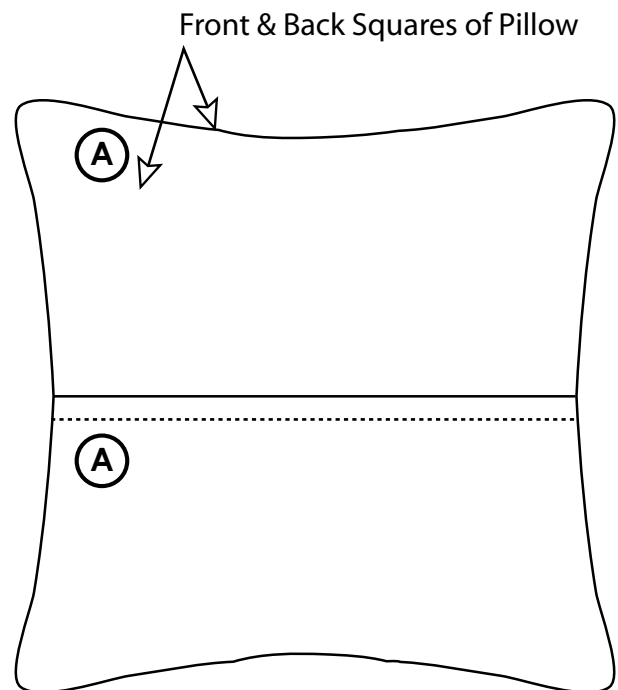

Ruffle Pillow Back

Glam-O-Ruffle Pillow

Instructions

Step 1:

CUT THE PIECES OUT OF YOUR FABRIC

Cut out all of the fabric pieces & interfacing called out in the "CUT" section.

Review the pillow diagram on the next page. Using your tape measure and chalk pencil, measure and mark the placement lines shown in the diagram, on the **right** side of the front pillow piece, for all ruffles and the center strip.

Step 2:

IRON ON INTERFACING

Iron interfacing to the **wrong** side of the center strip fabric piece, B.

Step 3:

MAKE THE RUFFLES

Follow these steps for each of the 6 ruffle pieces:

Fold the outward, long edge under 5/8" with wrong sides facing together. Press a crease using an iron. Then, stitch 1/4" from the top to the bottom of each ruffle piece.

On the opposite long edge of the ruffle, baste stitch 5/8" from the raw edge. Baste stitch a second parallel line 1/4", away from the 5/8" stitch, on the side near the raw edge.

Note: Leave thread tails long enough to pull.

Gently pull the two threads simultaneously, and gather the ruffle to 19 1/4" from top to bottom. Gently press the ruffle seam allowance with iron to reduce bulk.

Step 4:

SEW ON THE RUFFLES

Note: Sew the ruffles on top of the pillow front, from the outside in, on both the left and right sides.

Place Ruffle E, **right** side up, on the front pillow panel, with the raw edge at the 4 1/4" mark, according to the pillow diagram. Stitch between the two basting stitches. Remove basting stitches. Repeat for the right side. Repeat these steps for Ruffles D & C.

Note: Measurements for ruffle placement are measured from the edge of pillow, toward the center.

Place Ruffle D on the front pillow panel at the 6 3/4" mark. Place Ruffle C at the 9 3/4" mark.

Step 5:

SEW ON THE CENTER STRIP

Iron 1/4" seam allowance lengthwise on both sides of center strip.

Place the center strip in the center of the pillow front, with the edges covering the ruffled seam allowances and pin in place. Top stitch 1/4" from the edges of the center strip.

Note: Due to thickness of all layers of fabric, you may need to change out your sewing needle.

Step 6:

SEW THE BACK PILLOW PANELS

On each pillow back panel, on the 19 1/4" side, fold the edge under 3/4", press, then fold under again 3/4" press. Sew edge with a 5/8" seam.

Step 7:

ASSEMBLING THE PILLOW


With **right** sides facing each other, pin each of the pillow back pieces to the pillow front piece, with the opening horizontal. The pillow back pieces will overlap in the middle. Make sure to tuck in the ruffles.

Note: You may want to pin the ruffles to the front pillow piece in many places, to make sure you don't catch the ruffles when sewing the pillow together at the seam.

Sew pillow together by sewing closed all four sides. When finished, turn inside-out and stuff with a pillow insert through the horizontal opening in the back.

Glam-O-Ruffle Pillow

Pillow Pattern Diagram For Placement Lines

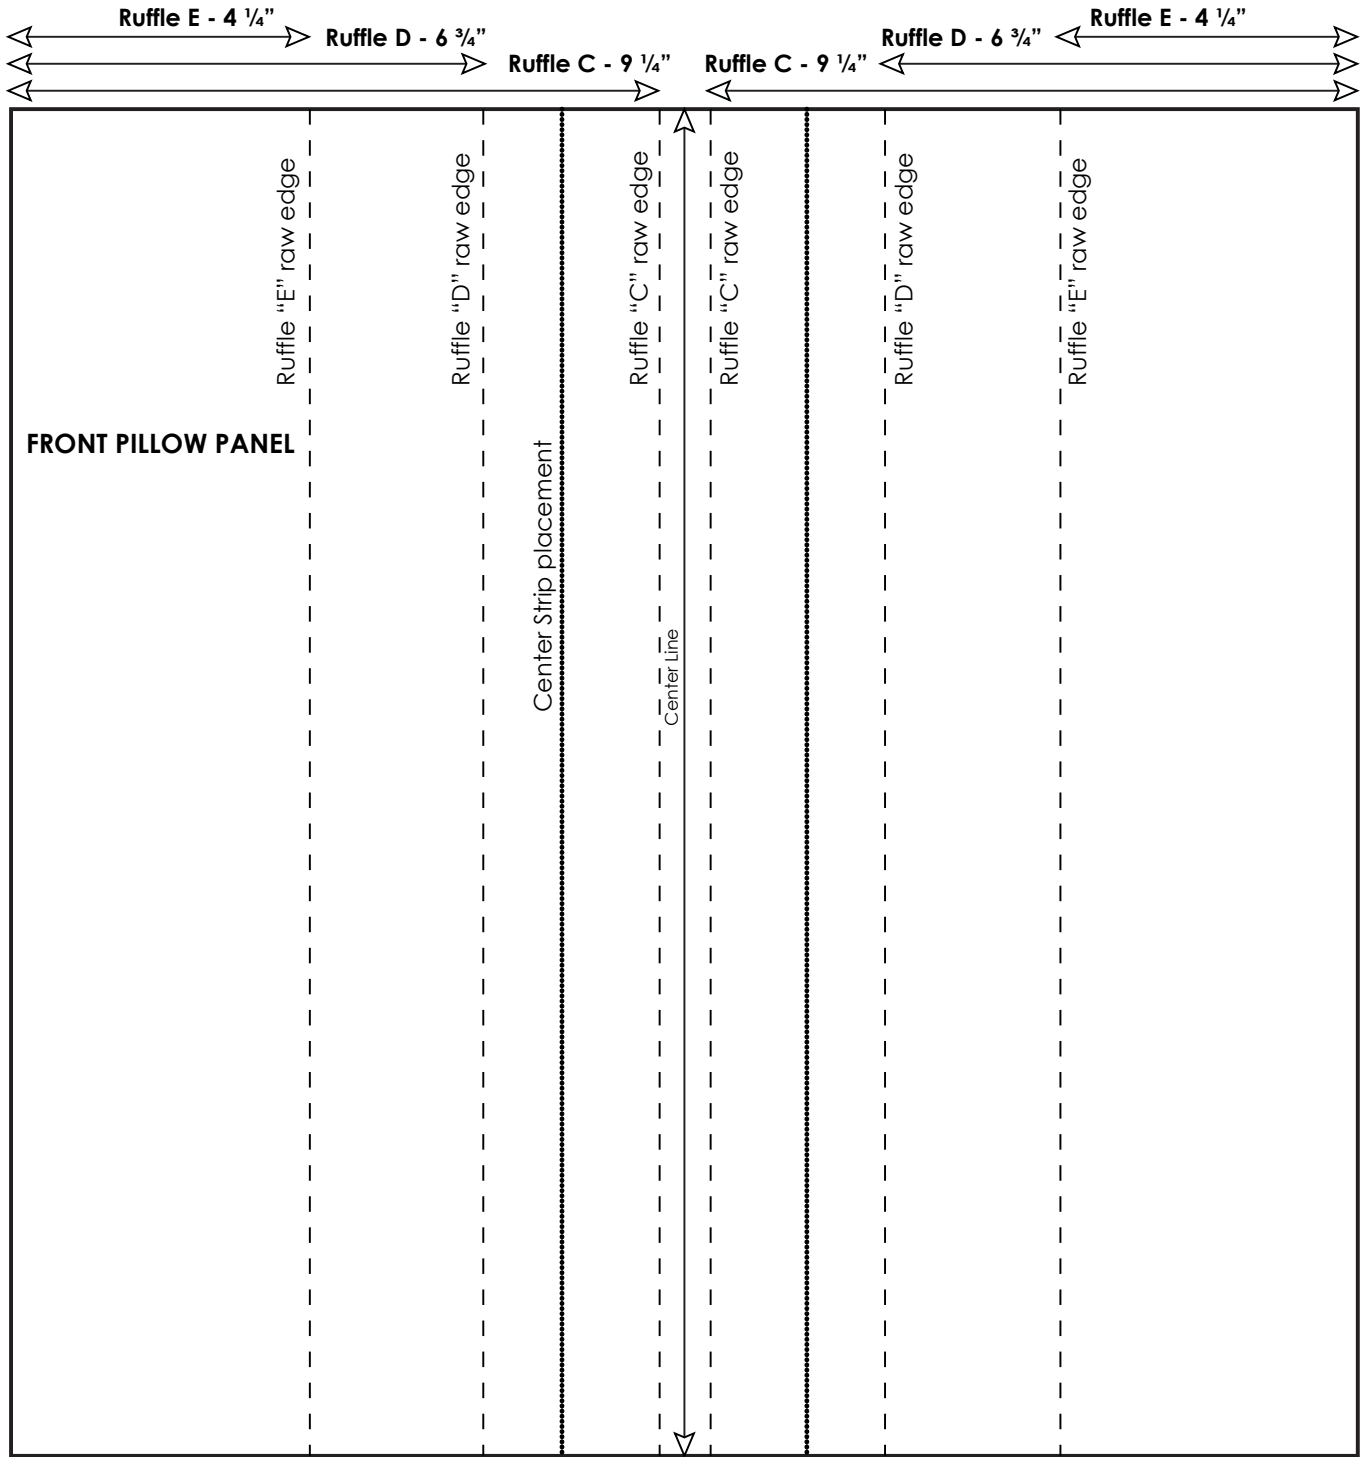

←—————→
PILLOW PANEL IS 19 1/4" SQUARE